





AETHER

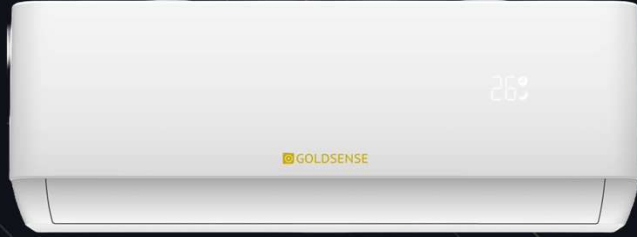

		GLSC09T-PRO	GLSC12T-PRO	GLSC18T-PRO	GLSC24T-PRO	
Tip		Pompa de caldura				
Control		Telecomanda IR/WIFI Ready				
Capacitate racire	W	2600(940~3300)	3400(1000~3770)	5100(1250-5900)	6840(1830-7820)	
Capacitate incalzire	W	2630(940~3360)	3420(1000~3810)	5130(1250-6080)	7050(1850~7960)	
Capacitate nominala	W	2600	3400	5100	6840	
SEER	W/W	6.1	6.1	6.1	6.5	
Clasa Energie		A++	A++	A++	A++	
SCOP	W/W	4.0	4.0	4.0	4.0	
Clasa Energie		A+	A+	A+	A+	
Consum Annual	Cooling	kwh/a	149	195	293	
Dezumidificare	ltri/h	1	1.2	1.5	1.8	
Putere sonora unitate interioara(S/H/M/L/Mute)	dB(A)	51/47/43/35/32	51/47/43/35/32	54/50/47/43/36	58/52/48/44/41	
Putere sonora unitate exterioara	dB(A)	60	60	65	68	
Presiune sonora unitate interioara(S/H/M/L/Mute)	dB(A)	41/37/33/25/22	41/37/33/25/22	43/41/38//35/27	47/42/38/34/31	
Presiune sonora unitate exterioara	dB(A)	50	50	55	57	
Alimentare		220-240V~/50Hz/1P	220-240V~/50Hz/1P	220-240V~/50Hz/1P	220-240V~/50Hz/1P	
Conexiune alimentare		Unitate exterioara	Unitate exterioara	Unitate exterioara	Unitate exterioara	
Voltaj	V	165~265	165~265	165~265	165~265	
Amperaj	Racire	A	4.0(1.2~8.0)	5.8(1.5~9.0)	8.2(1.7~12.0)	9.8(2.3~13.0)
	Incalzire	A	3.8(1.2~9.0)	5.1(1.5~10.0)	7.2(1.7~13.0)	8.6(2.3~14.0)
Putere consumata	Racire	W	825(240~1380)	1130(290~1500)	1574(330-2350)	2099(410~2800)
	Incalzire	W	767(240~1552)	1005(290~1720)	1382(340-2550)	1900(420~3000)
Tip refrigerant/Cantitate		R32/0.49kg	R32/0.49kg	R32/1.00kg	R32/1.11kg	
Recirculare aer	m³/h	560/560	560/560	820/820	1100/1100	
Debit UI Super /High/Mid-High/Middle/Low-Mid/Low/Mute	Racire	rpm	1180/1080/980/900/800/760/700	1180/1080/980/900/800/760/700	1360/1230/1120/1030/950/870/800	1220/1130/1060/990/920/850/750
	Incalzire	rpm	1120/1020/980/900/850/800/720	1120/1020/980/900/850/800/720	1360/1230/1120/1030/950/870/800	1220/1130/1070/1000/940/880/800
	Dezumidificare	rpm	760	760	870	850
	Sleep	rpm	/	/	/	/
Conexiuni Electrice		4x0.75mm²	4x0.75mm²	4x0.75mm²	4x0.75mm²	
Conexiuni frigorifice	Gas	3/8"	3/8"	3/8"	1/2"	
	Liquid	1/4"	1/4"	1/4"	1/4"	
Suprafata recomandata	m²	9~16	14~22	20~35	27~45	
Lungime maxima traseu	m	25	25	25	25	
Diferenta maxima nivel u/ue	m	10	10	10	10	
Limite functionare telecomanda	°C	16-31	16-31	16-31	16-31	
Limite functionare echipament	Exterior	°C	Cooling:-15-53/Heating:-20-30	Cooling:-15-53/Heating:-20-30	Cooling:-15-53/Heating:-20-30	Cooling:-15-53/Heating:-20-30
	Interior	°C	Cooling:17-32/Heating:0-30	Cooling:17-32/Heating:0-30	Cooling:17-32/Heating:0-30	Cooling:17-32/Heating:0-30
Dimensiuni nete (W x H x D)	Interior	mm	790x275x192	790x275x192	920x306x195	1100x333x222
	Exterior	mm	712x276x459	712x276x459	853x602x349	920x699x380
Greutate neta	Interior	kg	8	8	11	14
	Exterior	kg	22	22	35	40

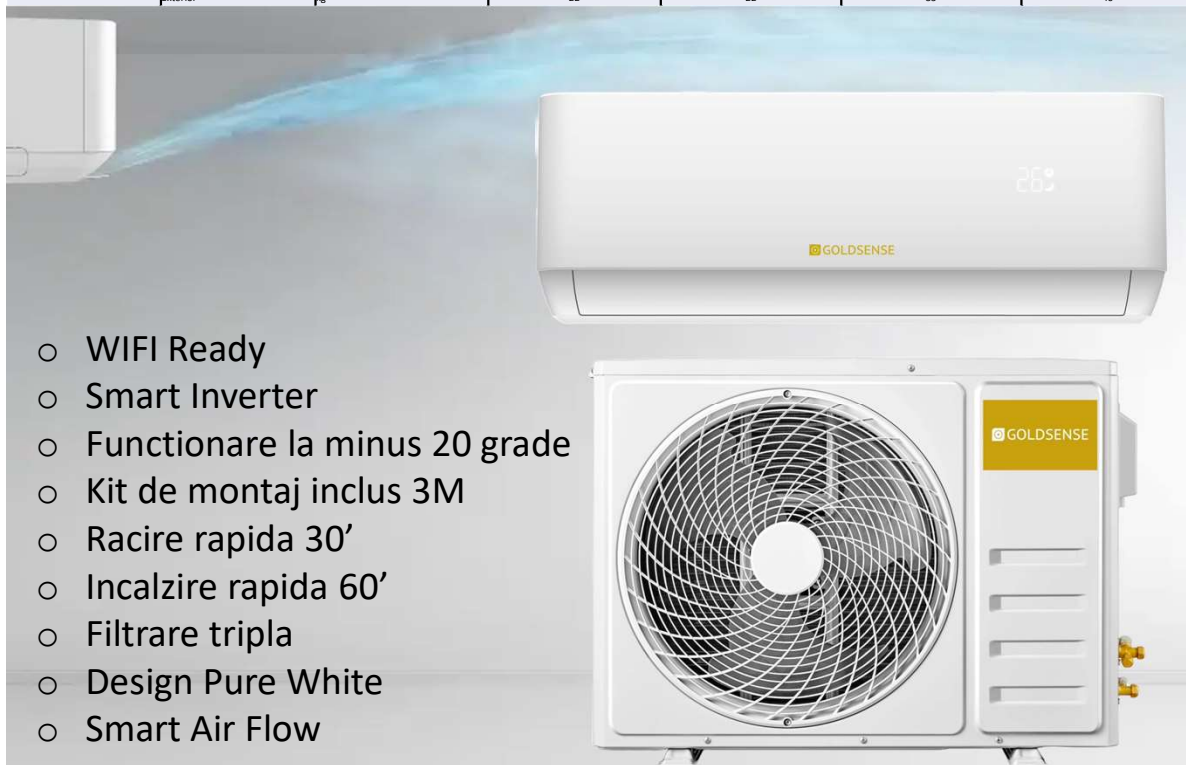

- WIFI Ready
- Smart Inverter
- Functionare la minus 20 grade
- Kit de montaj inclus 3M
- Racire rapida 30'
- Incalzire rapida 60'
- Filtrare tripla
- Design Pure White
- Smart Air Flow